



Bench with legs made of 50 x 100mm Corten steel sheet.
210 x 50 mm pine wood boards treated in vacuum pressure autoclave Class IV against woodworm, termites.
Stainless steel screws.

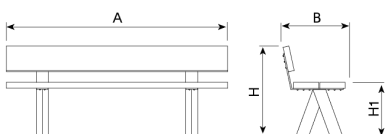

Ref.	A	B	H	H1
UM314	1850	520	755	450
UM314T	500	430	650	450
UM314B	1850	430	450	-
UM314G	1850	575	940	460



[Maintenance guide](#) | [Project sheet](#) | [CAD](#) | [Catalogue](#) | [3D](#) | [Mounting instructions](#) | [BIM](#) | [HD image](#)

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.

Note:
Natural wood "breathes" i.e. it absorbs humidity and releases it in dry atmospheres. It is therefore normal for cracks to appear in wood. This has no effect whatsoever on its strength and durability.
The rust of Corten steel evolves over time. Therefore, this material will rust sooner or later depending on the humidity and temperature levels.

Available in:

With epoxy primer coating and
Marson polyester feed.

