

BENITO

-Street Lighting


Pole
Villa
ICVI32+ILNA







Pole recommended for residential areas, pedestrian areas, historical center and condominiums. Made of cast iron. Anti-rust primer coating and matte black finish. 3/4" GAS female coupling. 3/4" connector not included.

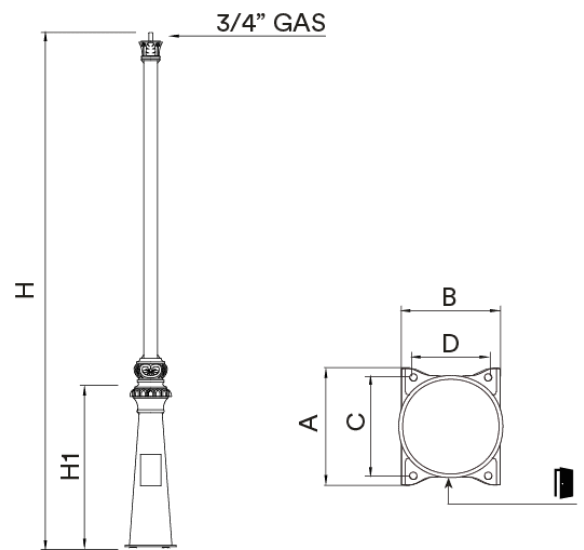

POLE:



Ref.	H	H1	A	B	C	D				
ICVI32	3200	905	320	275	273	207	M18x500	X	X	X

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [HD image](#)

Projects:




The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

ILNA

Luminaire

NEOVILLA-ALU



Classic decorative luminaire with an exclusive design including all necessary technical details for LED technology. Ideal for historical places and urban areas such as roads and squares. Ready for any intelligent lighting control solutions.

MAIN FEATURES:

- High efficacy. Up to 134 lm/W net
- From 20W to 80W
- 18 light distribution curves
- Zhaga Standard (Book 15)
- Tempered glass with sealing joint to obtain an IP66 rating
- Exclusive design
- Tool-less opening

APPLICATIONS:

- Residential areas
- Historical centres
- Green spaces
- Pedestrian areas and boulevards

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [BIM](#) | [HD image](#)


**BENITO
NOVATILU**

info@benito.com
tel. +34 93 852 1000 / +34 961 401 000

SPECIFICATIONS :

Housing material:	High pressure die-cast aluminium EN AC-43000, EN AC-43100, EN AC-43400, EN AC-44100, EN AC-47100 according to the UNE EN 1706 standard
Diffuser (optic system enclosure):	4mm tempered safety glass. UV filter. Optional: side diffusers
Fixing elements:	Stainless steel 18/8 - AISI 304
Housing:	Consists of three pieces: upper housing where the BENITO-NOVATILU LEDs module, the driver and the control electronics are located. Trapezoidal central block. Spider clamp
Sealing gaskets:	Silicone
IP rating (luminaire):	IP66
IP rating (optic system):	IP66
IK rating (impact resistance):	IK10
LEDs thermal dissipation:	Thermal dissipation through finless luminaire body, without conductive fluids. Passive convection dissipation ensuring thermal contact with the LED modules through a high-conductivity thermal transfer material
Anti-condensation valve:	Pressure-balancing valve to ensure moisture release, avoid condensation and maintain the luminaire IP tightness
Finish:	Polyester powder paint coating, electrostatically sprayed and sublimated in the oven. Resistant to corrosion
Colour:	Microtextured black. Optional: other colours and finishes
Mounting:	Top by means of a 3/4" gas connector. Optional: Ø60mm or suspended 3xM10 120°, accessory not supplied
Tilt range:	
Maintenance:	Tool-less opening by means of threaded part. Modular concept for easy component replacement: LEDs, drivers, SPD
Recommended mounting height:	3 - 7 m
Driver:	Constant current adjustable and programmable driver. Embedded in the luminaire, pre-wired on a galvanised steel plate
Driver control:	Dimmable driver 0-10V. Programmable on 5 levels. Optional: DALI 2. Includes the characteristics of Wireless, AOC, MTP, DTL
Dimming options:	<ul style="list-style-type: none"> - Autonomous multiple-level dimming or virtual midnight - Ready4IoT - Dimming by main voltage - Line switch
Surge protection device (SPD):	Type 2, 10kV and 20kA transient surge protector. Series connection with thermofuse disconnecter for a more effective protection at the end of its service life


DRAWING:

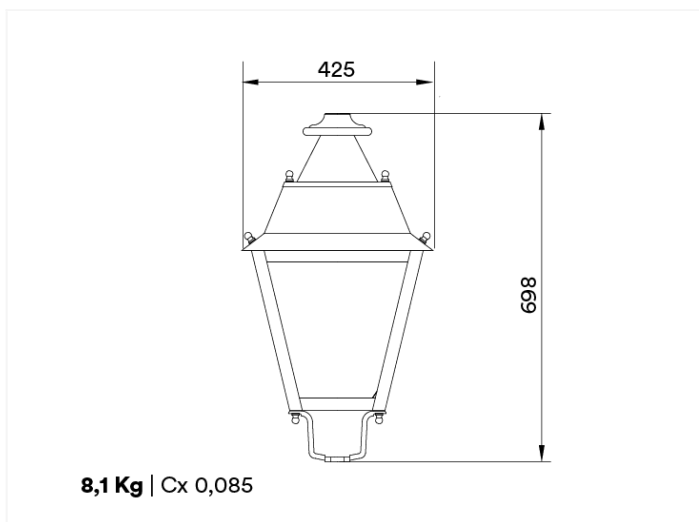


TECHNICAL DATA:

REF.	N° LEDs	Power W	I Driver mA	Real luminous flux (T) =85°C		Initial luminous flux (T) =25°C	
				Flux lm	Efficacy lm/W	Flux lm	Efficacy lm/W
Neovilla Alu ILNA	16	20	375	2600	130	2964	148
	16	30	563	3900	130	4446	148
	16	40	750	5160	129	5882	147
	16	60	1125	7680	128	8755	146
	32	80	750	10400	130	11856	148
	32	100	938	12900	129	14706	147

LEDs: 5050
 Nominal efficacy LED: 172 lm/W.
 Maximum LED current: 1000 mA.
 LED current = Driver current/2
 Lifetime L90B10: >100,000 hours.
 Luminous flux and efficacy at 4000°K and CRI>70.
 Luminous flux tolerance < +/-3%.
 Values may be subject to change due to LED binning.

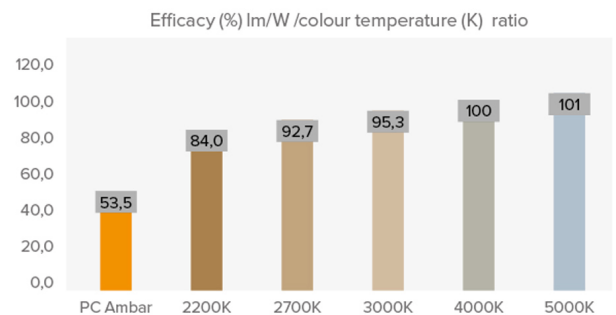

PHOTOMETRY:

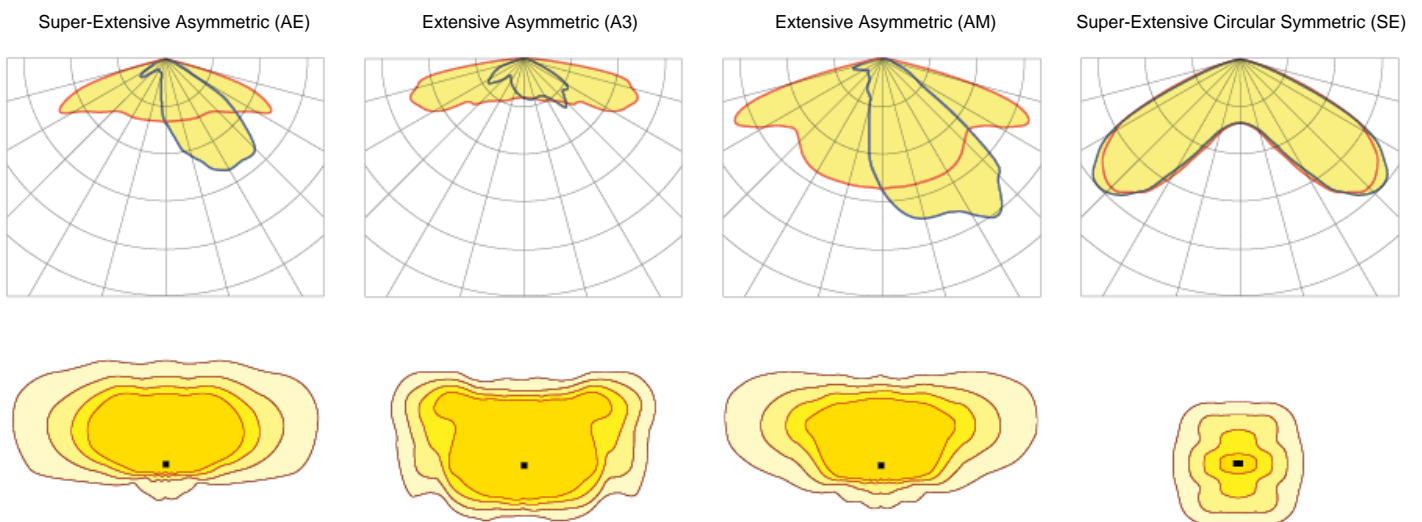

*Check the other available light distribution curves

LEDs MODULE:

LEDs module:	BENITO-NOVATILU Zhaga standard for 16 and 32 LEDs. Check colour temperature, CRI and light distributions	
Replaceable module:	Yes	
LED:	5050	
Number of LEDs:	16 /32	
PCBs format:	2x Zhaga (Book 15) 2x4 or 2x Zhaga (Book 15) 2x8	
LED nominal efficacy:	172	
Colour temperature:	PC Amber, 2K2, 2K7, 3K, 4K, 5K	
Colour rendering index CRI:	>70 (optional >80)	
Average LED useful time L90B10:	L90B10 >100,000 hours	

OPTIC SPECIFICATIONS:

Optic system:	PMMA lenses 2x2	
Light distributions:	18 light distribution curves	
Upward light output ratio ULOR:	0%	
Downward light output ratio DLOR:	100%	
Glare index:	Between D5 and D6 (depending on the light distribution)	
Luminous intensity category:	Between G*4 and G*6 (depending on the light distribution)	
Luminous flux CIE n°3:	>95%	
Photobiological safety:	RG0 (exempt of risk)	
Initial luminous flux Tj=25°C (up to):	lm	14706
Initial luminaire efficacy Tj=25°C (up to):	lm/W	148
Real luminous flux Tj=85°C (UNE EN 13032-4) (up to):	lm	12900
Real luminaire efficacy Tj=85°C (UNE EN 13032-4) (up to):	lm/W	130

ELECTRIC SPECIFICATIONS:

Nominal maximum power (LEDs):	W	73
Maximum power consumed (luminaire):	W	80
Power range:	W	20 - 80W
Maximum current of LED:	mA	<500 (<50% I _{max})
Power supply protection classes IEC:	Class I and II	
Surge protection device (SPD):	Type 2, 10kV and 20kA transient surge protector. Series connection with thermofuse disconnecter for a more effective protection at the end of its service life	
Common and differential mode protection (SPD) Udc:	kV	10 et NTC en option
Max current (8/20) (SPD):	kA	20
Thermal phase disconnection (SPD):	Yes	
Input voltage:	Vac	220-240
Input voltage (max rate):	Vac	198-264
Input frequency:	Hz	47-63
Starting current:	A	<65
Duration of the starting voltage peak:	ms	<0.3
Driver efficacy:	>90%	
Power factor 100% consumption:	>0.98	
Power factor 50% consumption:	>0.95	
Total harmonic distortion (THD):	<10	
Power consumption on standby mode:	W	<0.4
Energy class:	A++ IPEA>1.15	

OPERATING CONDITIONS:

Average LED useful time L90B10:	>100,000	
Average driver useful life to Tp <70°C:	100,000	
Average luminaire useful life L80B10 (TM-21):		
Ambient temperature (Ta):	°C	From -35°C to +50°C
Aerodynamic resistance (CxS):	m2	0.085
Vibration test (15Hz 3 axis):		
Wind load test:		
Guarantee:	years	5 years (extensible up to 10 years)

PACKAGING DIMENSIONS:

Net weight	kg	8.1
Gross weight	kg	
Luminaire dimensions (LxWxH)	mm	425x425x698
Packaging dimensions (LxWxH)	mm	
Pieces per box		1
Quantity per container 20ft		
Quantity per container 40ft		

CERTIFICATES:

Security certificates:	EMC certificates:	Other certifications:
EN 40 / EN 62031 / EN 62493 / EN 62471 / IEC 62778 / EN 55015 / EN 61547 / EN 61000-3-2 / EN 61000-3-3 / IEC 62262 / EN 13032-4 / EN 62717 / EN 6272-1 / EN 6272-2-1 / EN 61247-2-14	EN 61347-2-13 / EN 61347-1 / EN 62384	6272-2-1 / EN 61643-12